


16 BAR

Acc. to BS EN 1092-1

BLIND FLANGES

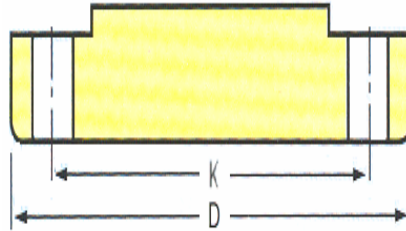

TYPE 05

NPS	D	K	Size	No.	C4	H1	R
15	95	65	M12	4	14	20	4
20	105	75	M12	4	14	24	4
25	115	85	M12	4	16	24	4
32	140	100	M16	4	16	26	6
40	150	110	M16	4	16	26	6
50	165	125	M16	4	18	28	5
65	185	145	M16	8**	18	32	6
80	200	160	M16	8	20	34	6
100	220	180	M16	8	20	40	8
125	250	210	M16	8	22	44	8
150	285	240	M20	8	22	44	10
200	340	295	M20	12	24	44	10
250	405	355	M24	12	26	46	12
300	460	410	M24	12	28	46	12
350	520	470	M24	16	30	57	12
400	580	525	M27	16	32	63	12
450	640	585	M27	20	40	68	12
500	715	650	M30	20	44	73	12
600	840	770	M33	20	54	83	12
700	910	840	M33	24	48	83	12
800	1025	950	M36	24	52	90	12
900	1125	1050	M36	28	58	94	12
1000	1255	1170	M39	28	64	100	16

* All Dimensions in mm.

** Subject to agreement between the Manufacturer and the Purchaser 4 holes can be used for PN16, DN65 Steel Flanges

DN Nominal Size
 K Pitch Circle Diameter
 SIZE Size of Bolts
 No Number of Holes
 C4 Thickness of Flange
 H1 Length of Flange
 R Corner Radius