


# 25 BAR

Acc. to BS EN 1092-1

## BLIND FLANGES

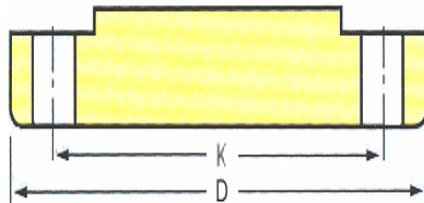

TYPE 05

NPS	D	K	Size	No.	C4	H1	R
15	95	65	M12	4	14	20	4
20	105	75	M12	4	14	24	4
25	115	85	M12	4	16	24	4
32	140	100	M16	4	16	26	6
40	150	110	M16	4	16	26	6
50	165	125	M16	4	20	34	6
65	185	145	M16	8	22	38	6
80	200	160	M16	8	24	40	8
100	235	190	M20	8	24	44	8
125	270	220	M24	8	26	48	10
150	300	250	M24	8	28	52	10
200	360	310	M24	12	30	52	10
250	425	370	M27	12	32	60	12
300	485	430	M27	16	34	67	12
350	555	490	M30	16	38	72	12
400	620	550	M33	16	40	78	12
450	670	600	M33	20	46	84	12
500	730	660	M33	20	48	90	12
600	845	770	M36	20	58	100	12
700	960	875	M39	24	-	-	12
800	1085	990	M45	24	-	-	12
900	1158	1090	M45	28	-	-	12
1000	1320	1210	M52	28	-	-	16

\* All Dimensions in mm.

DN Nominal Size  
 K Pitch Circle Diameter  
 SIZE Size of Bolts  
 No Number of Holes  
 C4 Thickness of Flange  
 H1 Length of Flange  
 R Corner Radius